


ALPINE CONTEMPORARY 24x36



With a smooth natural texture and chamfered edges, this 24x36 paver adds refined elegance to patios, walkways, and poolside areas. Its larger dimension and durable design enhance your outdoor space with lasting beauty and sophistication.


nicolock[®]
PAVING STONES • RETAINING WALLS • OUTDOOR LIVING
 **paver-shield**[™]



120 Sq Ft on Pallet
20 Pcs on Pallet
Pallet Weight: 3,330 lbs



23 $\frac{5}{8}$ " x 35 $\frac{3}{4}$ " x 2 $\frac{3}{8}$ "



Adobe Blend



Cappuccino Blend*




Chesapeake Blend*



Dove Gray



Golden Brown Blend




Granite City Blend



Graphite Pearl Blend*



Hudson Valley Blend




Marble Blend*



Oceanic Blue*



Oyster Blend*



Pennsylvania Blue**




Sahara*




Silver Mist*



Snow*



South Bay Blend*



Travertine*




Westchester Blend

*Premium Color
**Deluxe Color


INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

NICOLOCK PAVING STONE 1"- 3 1/8" THICK

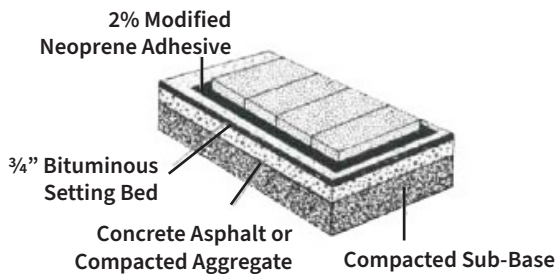

CROSS-SECTION OF TYPICAL INSTALLATION

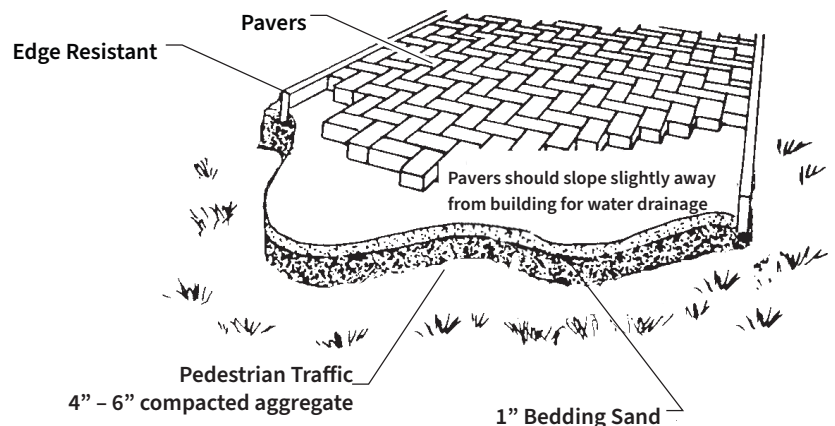

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.