

# BLUE RIDGE CONTEMPORARY




*South Bay Blend*




Enhance your outdoor space with our new Blue Ridge Contemporary! Multi-sized rectangular shaped pavers with a smooth surface create sleek lines for a modern, sophisticated design. Available in our standard 2 $\frac{3}{8}$ " thickness or 3 $\frac{1}{8}$ " thickness for vehicular applications.

**nicolock**<sup>®</sup>  
PAVING STONES • RETAINING WALLS • OUTDOOR LIVING  
 **paver-shield**<sup>™</sup>



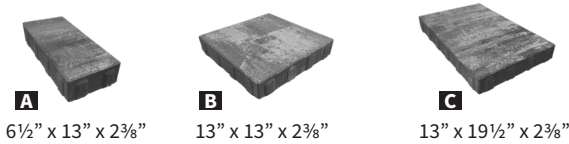

106 Sq Ft on Pallet  
 100 Pcs on Pallet | A- 40 B- 40 C- 20  
 Pallet Weight: 2,761 lbs




\*Premium Color  
 \*\*Deluxe Color

**Now available for vehicular applications!**  
**Purchase in 3⅝" thickness (80mm)**


#### INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

#### NICOLOCK PAVING STONE 1"- 3 ⅝" THICK

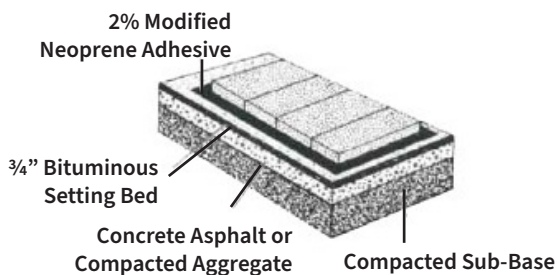

#### CROSS-SECTION OF TYPICAL INSTALLATION

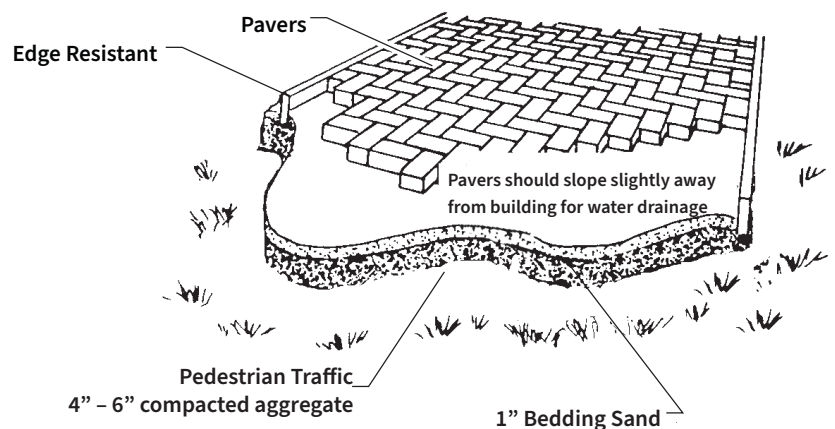

**NOTE:** All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

**CAUTION:** Always use a plate compactor with a pad when installing any textured paving stone.