

STONE RIDGE CONTEMPORARY 18x18



Travertina

Graphite Pearl Blend

Single sized 18x18 paver with a smooth and modern finish. Slightly chamfered edge.

nicolock[®]
PAVING STONES • RETAINING WALLS • OUTDOOR LIVING
 **paver-shield**[™]



131 Sq Ft on Pallet
60 Pcs on Pallet
Pallet Weight: 3,537



18" x 18" x 2 3/8"



Adobe Blend



Autumn Blend*



Cappuccino Blend*



Chesapeake Blend*



Crab Orchard Blend*



Golden Brown Blend



Granite City Blend



Graphite Pearl Blend*



Hudson Valley Blend



Marble Blend*



Oceanic 5*



Oceanic Blue*



Oyster Blend*



Peconic 6*



Pennsylvania Blue**



Silver Mist*



South Bay Blend*



Travertina*




Westchester Blend

*Premium Color
**Deluxe Color


INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

NICOLOCK PAVING STONE 1"- 3 1/8" THICK

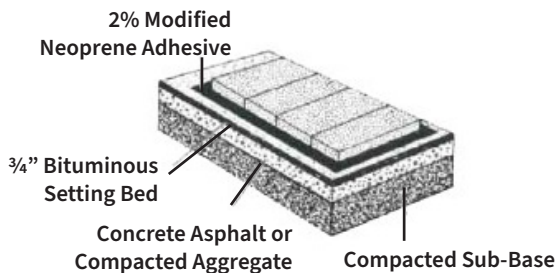

CROSS-SECTION OF TYPICAL INSTALLATION

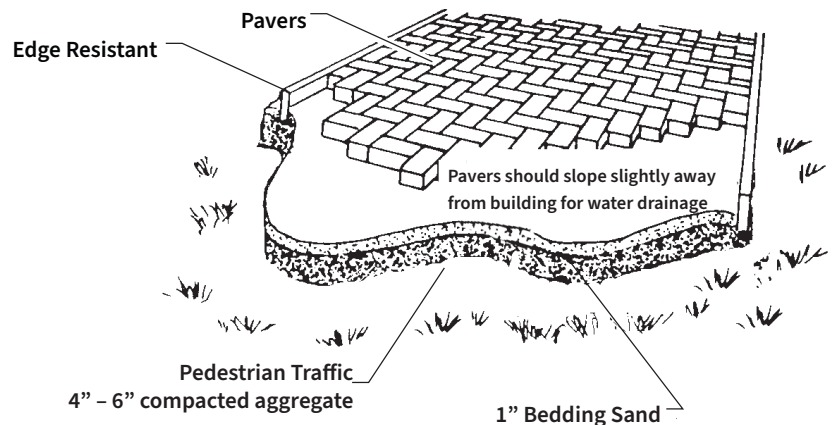

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.